

SCHEDA DI RILIEVO ACUSTICO (N° progressivo 20)
U.T. 465

COMUNE: REMANZACCO (UD) – POSTAZIONE: 29 GIORNO
RUMORE DA TRAFFICO VEICOLARE

Header information:

Device type SVAN 945A
Serial No. 4137
Internal software version ... 5.12
File system version 5.12

Original file name 22MA0829
Associated buffer name Buffer_9
Measurement hour 12:45'02
Measurement day 12/05/22
Device function LEVEL METER

Title text:

Input Microphone
Mic. polarization 200 V
Mic. field correction FREE
Mic. outdoor filter OFF
Compensation filter OFF
Measurement range 130 dB
Leq integration Linear
Trig. mode Off
Start delay 5 s
Integration time def. 20 m
Repetition cycle 1
Number of histograms 0
Calibration type Measurement
Calibration time 08:47'58
Calibration date 12/05/22
Rotation measurement OFF

Profile: #1 #2 #3

Weighting filter A A Lin
Detector type Fast Fast Imp.
Buffer contents definition .. RMS MAX MAX
Calibration factor 0.8 dB 0.8 dB 0.8 dB


STUDIO • FAROLFI

Architettura Acustica

Main results:

Start	Prof	Filter	Detect	Time	units	Peak	Min	Max	Spl	Leq
yy/mm/dd	hh:mm:ss			hh:mm:ss						
12/05/22	12:45'02	#1	A	Fast	00:20'00	dB	118.5	33.5	89.1	54.1 59.4

dB BUFFER CONTENTS Profile #1 - RMS (A) [aggreg.degree=2]

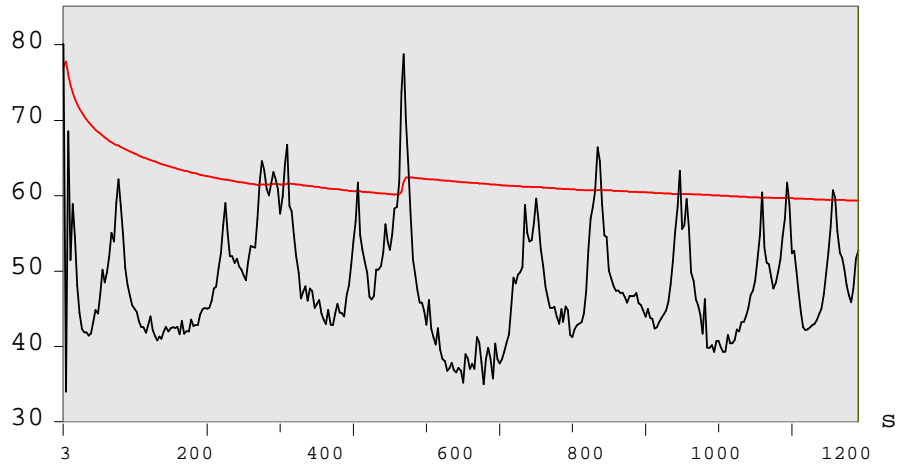

Cursor: t[480]=1200.0s (12:50'47) Lev=52.8dB

Markers: t0=1s t1=1200s

LEQ=59.4dB